

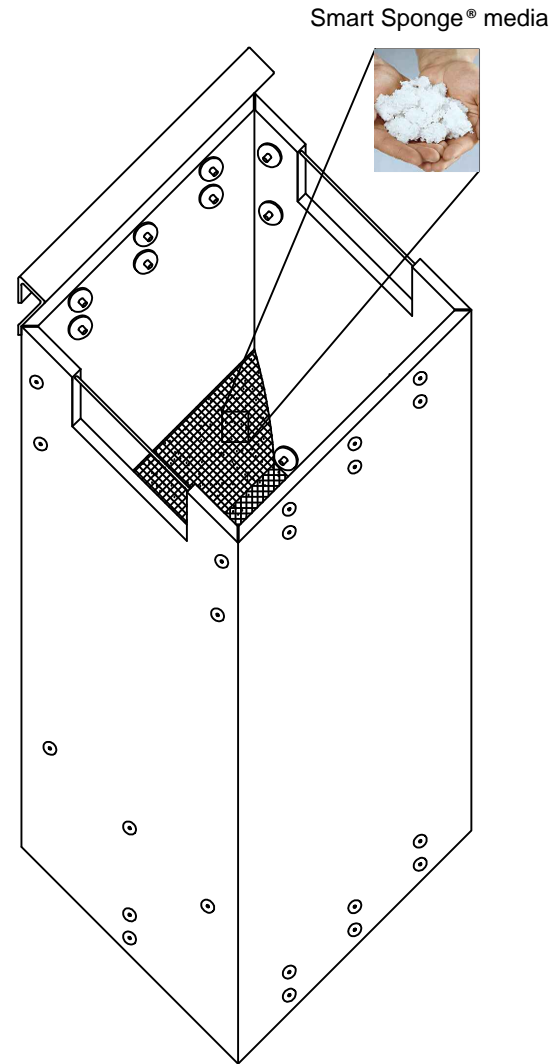



NOTES

The following information relates to the product shown:

1. 80% total suspended solids (TSS) removal
2. 80% oil / grease removal
3. 280 gallons per minute (GPM) filtration rate before the built-in bypass
4. Ultra Urban Filter Curb Opening (CO) will be attached to a mounting bracket as per installation instructions
5. CO1414N contains 16 lbs (+/- 10%) of Smart Sponge® media

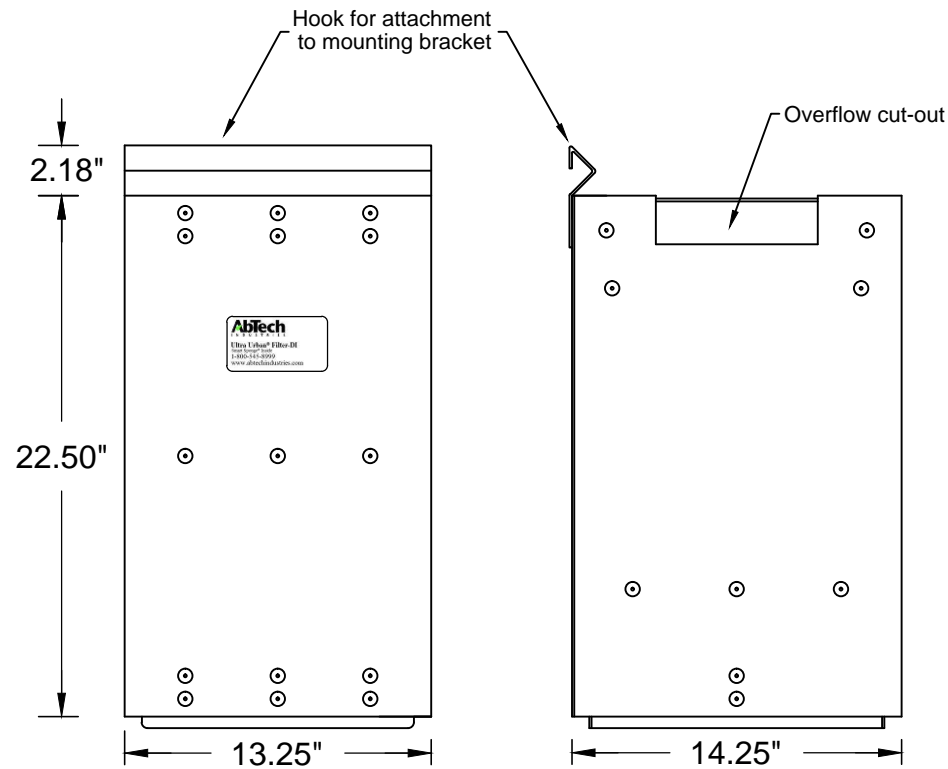

PROJECT NAME:	PROJECT CONTACT ENGINEER:	 <p>These drawings are the property of Abtech Industries, Inc. Drawings may not be printed, reproduced or used without the prior written consent of Abtech Industries, Inc.</p>
LOCATION:	CONTACT:	
ULTRA URBAN CURB OPENING (CO) SMART SPONGE® FILTER CO1414N	SITE MANAGER:	<p>SCALE [FULL SCALE]: 1.5 inches = 12 inches</p> <p>PROJECT ENGINEER:</p> <p>DRAWN BY: APB</p> <p>DESIGNED BY:</p> <p>CHECKED BY:</p> <p>ISSUE DATE: 01/18/2017</p> <p>PROJECT NO:</p> <p>SHEET TITLE: Ultra Urban Curb Opening (CO) Smart Sponge® Filter - CO1414N</p> <p>SHEET NUMBER: 1</p>