

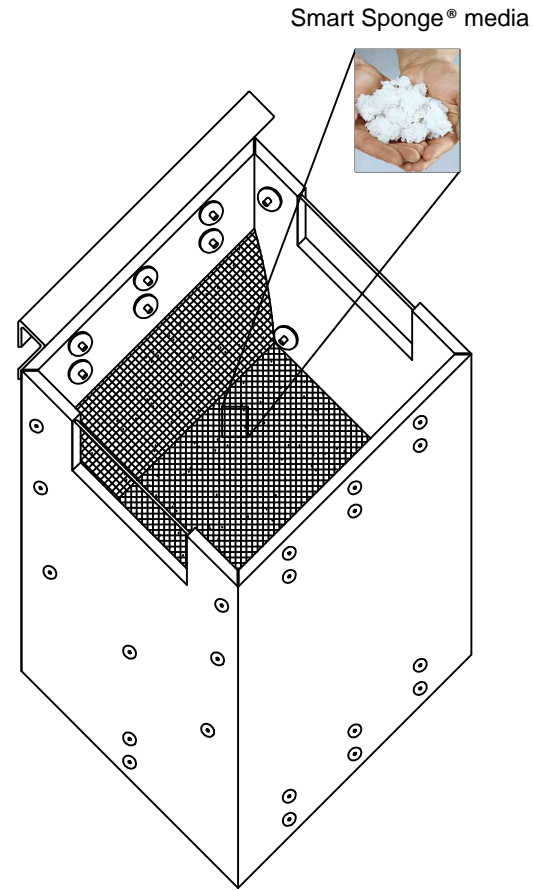


NOTES

The following information relates to the product shown:

1. 80% total suspended solids (TSS) removal
2. 80% oil / grease removal
3. 190 gallons per minute (GPM) filtration rate before the built-in bypass
4. Ultra Urban Filter Curb Opening (CO) will be attached to a mounting bracket as per installation instructions
5. CO1414H contains 10 lbs (+/- 10%) of Smart Sponge® media

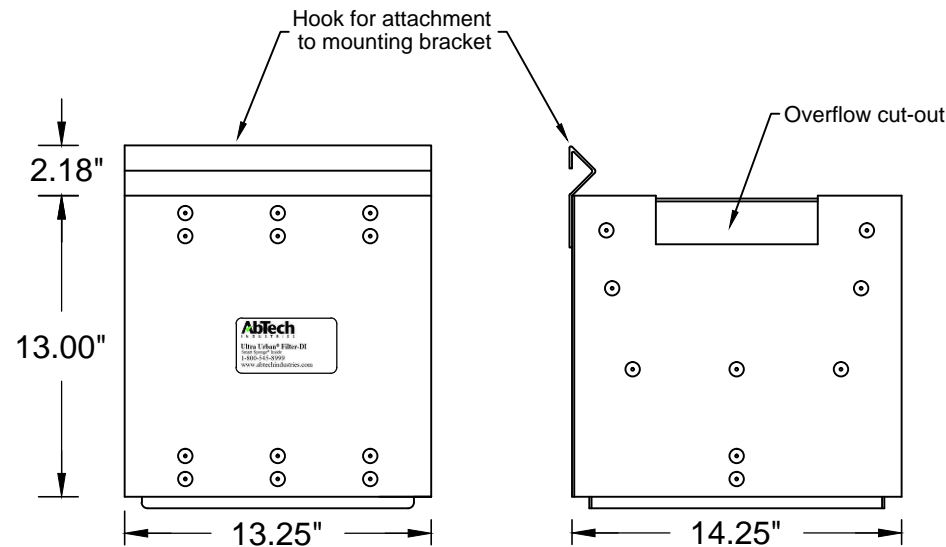

PROJECT NAME:	PROJECT CONTACT ENGINEER:	SCALE (FULL SCALE): 1.5 inches = 12 inches
LOCATION:	CONTACT:	PROJECT ENGINEER:
ULTRA URBAN CURB OPENING (CO) SMART SPONGE® FILTER CO1414H	SITE MANAGER:	DRAWN BY: APB
		DESIGNED BY:
		CHECKED BY:
		ISSUE DATE: 01/18/2017
		PROJECT NO.:
		SHEET TITLE:
		Ultra Urban Curb Opening (CO) Smart Sponge® Filter - CO1414H
		SHEET NUMBER:
		1



These drawings are the property of Abtech Industries, Inc. Drawings may not be printed, reproduced or used without the prior written consent of Abtech Industries, Inc.